





Makes horses feel better!

BELMONDO® rubber floorings for horses

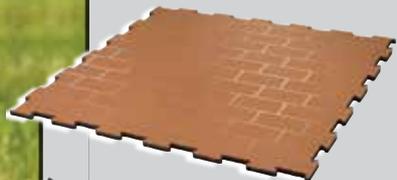

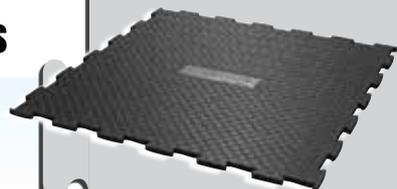

KRAIBURG - predominant in the rubber industry

KRAIBURG has established itself as an expert specialist in the rubber business. The KRAIBURG Holding GmbH & Co. KG has a staff of more than 1,800 employees worldwide, mainly in Germany, Austria and Switzerland.



BELMONDO® rubber floorings have been developed by KRAIBURG's specialists, who have 60 years of expertise in the production of all types of rubber compounds.

All BELMONDO® products are suitable for **looseboxes as well as open stables.**

Products and Application

BELMONDO®	loosebox	wall	walkway	washing area	paddock/trails	horsewalker	page
Basic*	x		x				4
Classic*	x		x				4
Trend*	x						5
Rodeo		x					5
Walkway*			x				6
Colour*			x	x			6
Paddock*			x	x	x		7
Paddock grid					x		7
Horsewalker P						x	8

* with 4 puzzle shaped edges as standard
 Special dimensions are generally available on request.
 All BELMONDO® products can be combined with each other.

BELMONDO®: Tailored to the needs of your horse

- enhanced slip resistance
- appropriate softness benefits the hoof mechanism and protects tendons as well as joints
- heat insulation and noise reduction
- less noise and less dust exposure contribute to a healthier climate in the stable
- easy installation due to interlocking joints
- solid rubber mats: long durability, recyclable
- significant savings on bedding and reduced manure volume

Minimizes costs and labour - leaving more time for the horse!

Trafficability

BELMONDO® mats can be driven over with standard equipment such as front end loader or tractor with authorized pneumatic tyres at the recommended inflation pressure up to max. 4 bar. (Notice: drive with due care and steer in large radius!)

Installation

BELMONDO® mats can be laid on any hard/paved surface without gluing or screwing in place.

Ask for our installation instructions!

Our installation service: We are happy to make an individual offer for the installation!

Leftover pieces can be well used in a different place - wastage is minimized!


Hygiene and well-being

BELMONDO® rubber mats are impermeable to water and easy to clean.

To absorb fluids (urine) a small amount of bedding is always required in the loosebox. We also recommend a minimal amount of bedding in the open stable.

The requirements depend on the bedding type, the individual behaviour of the horse and the stable climate.

Cut off puzzle shaped edge and leave a space of 1-2 cm towards the wall as expansion joint

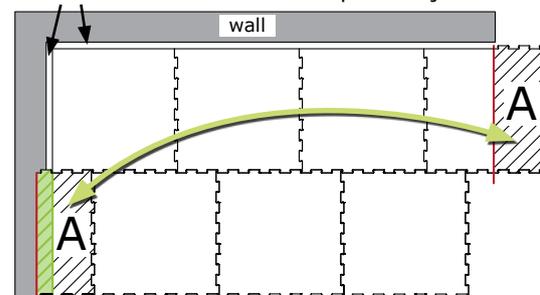

BELMONDO® Basic


Good basic comfort
for lower stress areas



Surface: horseshoe profile
Lower side: grooves
Thickness: 18 mm
Dimensions: 1 m x 1 m


For shoes without pins and studs.

Comfortably soft and slip-resistant for loosebox and walkway - suitable for vehicle traffic!



BELMONDO® Classic

For higher stress areas –
also for pins and studs

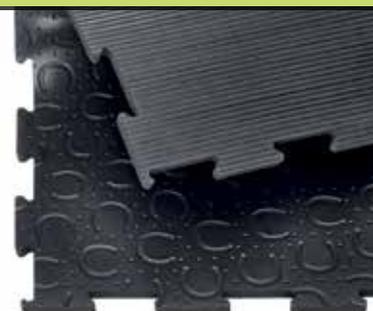

Surface: horseshoe profile
 with wear resistant top coat
Lower side: grooves
Thickness: 18 mm
Dimensions: 1 m x 1 m

New thickness!



BELMONDO® Trend

For extra lying comfort – horse-friendly softness



NEW!

- Surface:** horseshoe profile with wear resistant top coat
- Lower side:** air cushions with sealing lips
- Thickness:** 28 mm
- Dimensions:** 1 m x 1 m

Minimized soiling underneath the mat due to the sealing lips.



BELMONDO® Rodeo

Protects wall and horse



NEW!

- Surface:** wooden planks optics
- Lower side:** grooves
- Thickness:** 11 mm
- Dimensions:** 1.30 m x 3.50 m



BELMONDO® Walkway

The cost-effective alternative
for lower stress areas




Surface: horseshoe profile
Lower side: grooves
Thickness: 11 mm
Dimensions: 1 m x 1 m

Also suitable for horse trailers.

For shoes without pins and studs.
 Not suitable for vehicle traffic.

BELMONDO® Colour

Brings colour into your stable

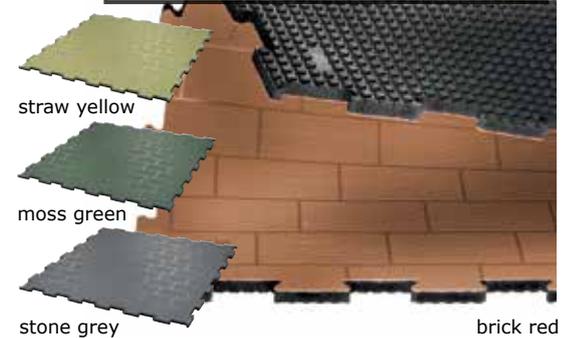

straw yellow

moss green

stone grey

brick red


Surface: brick effect profile
Lower side: studs (2 mm)
Thickness: 19 mm
Dimensions: 1 m x 1 m

Attractive brick design in fresh colours.

For indoor use.

BELMONDO® Paddock

Optimal wet slip-resistance
with UV and ozone protection

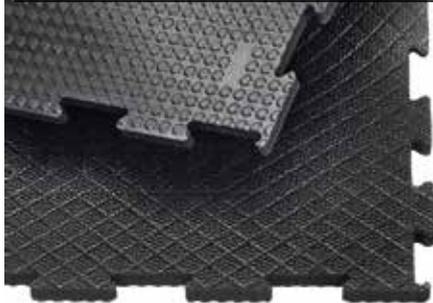

Surface: rhombic profile
with wear resistant top coat
Lower side: studs (5 mm)
Thickness: 20 mm
Dimensions: 1 m x 1 m



BELMONDO® Paddock grid

Easy and trafficable
soil stabilisation



Material: plastic
Thickness: 4 cm
Dimensions: 53.5 cm x 37.0 cm
(5 pieces/m²)

BELMONDO® Drain gutter

special mat pieces from BELMONDO®
Paddock for fitting on gullies or gutters

Dimensions:
16.7 cm x 1 m



BELMONDO® Gully

Dimensions:
40 cm x 40 cm



HORSEWALKER

BELMONDO® Horsewalker P

Electrically conductive
Optimal wet slip-resistance
with UV and ozone protection



- Surface:** rhombic profile with wear resistant top coat
- Lower side:** studs (2 mm)
- Thickness:** 19 mm
- Dimensions:** individually tailor-made

Suitable for every horsewalker.

Requirement:
hard/paved floor (concrete, asphalt, ...)



Your BELMONDO dealer:

Tolerances

Belmondo® Basic, Rodeo: thickness +3/-2 mm
Belmondo® Classic, Trend, Walkway, Colour, Paddock, Gully, Drain gutter, Horsewalker P: thickness +2/-1 mm
length + width each +/- 1.5 % (DIN ISO 3302-1 tolerance class M4)
The tolerances also apply within the mat.

More technical details on request. The products presented here generally should only be used for the listed applications. Technical specifications are subject to alterations. All sales are subject to our General Terms and Conditions. Legal basis is the German version of the document.

03/2013 - I

BELMONDO® is a trademark of the company group



KRAIBURG Elastik GmbH

Göllstraße 8
84529 Tittmoning
GERMANY

Tel: +49/86 83/701- 527

Fax: +49/86 83/701- 4527

e-mail: belmondo@kraiburg-elastik.de
www.kraiburg-belmondo.com



find us on
[facebook.com/KraiburgBelmondo](https://www.facebook.com/KraiburgBelmondo)