



**Ground-Standing Horse Walker,  
Round with Partial Roof**



**Kraft** ...keeps your horses fit!

Horses love roaming. In their natural environment they will cover up to 50 kilometers daily in search for food.

The health and vitality of a horse is linked directly to the amount of exercise it gets.

A partial roof (covered walking surface) protects the horses from wind and rain and the horse walker can be used year-round.

**Kraft** ...keeps your horses fit! – from walk to gallop.



## Ground-Standing Horse Walker, Round with Partial Roof

### Standard of Performance:


- K** Planning, structural engineering, design, building permits, timely installation as well as concrete foundations, turnkey construction
- K** 3 varieties of rotating gates (see technical spec sheet number 1)
- K** Various control panel configurations (see technical spec sheet number 2)
- K** Optional irrigation system (see technical spec sheet number 3)
- K** 5 varieties of roofing materials (see technical spec sheet number 4)
- K** Traditional hinged or sliding gates (see technical spec sheet number 5)
- K** Covered entry with flat or pitched roof (see technical spec sheet number 6)
- K** Various fence styles (see page 3)
- K** For 4 - 10 horses, 12 - 40 Meter diameters
- K** Industrial belt drive, low maintenance and quiet
- K** Simple operation, sturdy construction and high safety standards
- K** All products can be custom designed according to client needs. Optional self-installation available

### Title photo:


Anjou of Auftritt from Kessy.  
Breeder: The Kraft Family



Top view of horse walker with partial roof

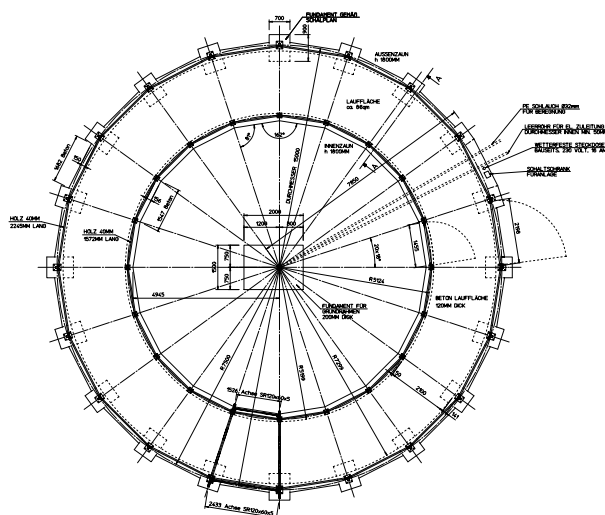

Cross section of horse walker with partial roof

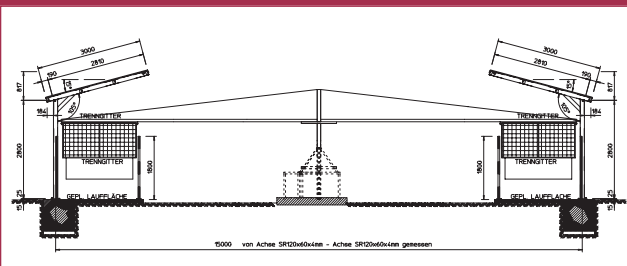

## Sample of Fence Varieties



### Fence Type D

- ▶ horizontal spruce boards, 40 mm thick
- ▶ solid up to 2 Meters with top bite-guard



### Fence Type E

- ▶ horizontal hardwood boards, 40 mm thick
- ▶ solid up to 2 Meters with top bite-guard



### Fence Type F

- ▶ horizontal spruce boards, 40 mm thick
- ▶ solid up to 1.5 Meters
- ▶ with hot-dipped galvanized framed welded-wire grid from 1.5 to 2 Meters



### Fence Type G

- ▶ horizontal hardwood boards, 40 mm thick
- ▶ solid up to 1.5 Meters
- ▶ with hot-dipped galvanized framed welded-wire grid from 1.5 to 2 Meters



### Wind Net and Weather Shield

- ▶ Wind net between fence and roof to protect walking surface
- ▶ Wind shield – sturdy corrugated polypropylene to protect walking surface



**Samples:**  
**Standard Round Ground-Standing  
Horse Walker with Partial Roof**



*Bartolini Racing Stables, Mortroux, Belgium. Partial roof with corrugated concrete fiber roof*



*Doumen Racing Stables, Lamorlaye, France. Partial roof with corrugated bitumen roof*



*Phillip Retirement Stables, Neuhausen, Germany. Partial roof with corrugated bitumen roof, covered entry and wind net*



*Overbrook-Farm, Lexington, Kentucky (USA). Partial metal roof*

**Uwe Kraft**  
**Reitsportgeräte & Metallbau GmbH**

Riedwasen 10  
74586 Frankenhardt - Honhardt

Telefon (07959) 7 02  
Telefax (07959) 25 94

Internet: [www.kraft-fuehranlagen.de](http://www.kraft-fuehranlagen.de)  
email: [info@reitsportgeraete.de](mailto:info@reitsportgeraete.de)